



Dual Head PQS & PQL

Two peristaltic pump heads powered by a single motor allow the pump's heads to be individually set to supply or return. This ability, coupled with the pump's variable speed capability and ability to reverse direction for several pumping configurations.

- Supply one ink to two separate decks.
- Supply two separate inks to two separate decks.
- Supply and return one ink to one deck.

STANDARD FEATURES

Includes all peristaltic features listed on pages 10-11.

Variable speed for flow control.

Reversible flow for easy draining and flushing.

Straight-Thru patented design eliminates flow stoppage from tube kinks.

"Quick Change" Removable Heads.

Eight-position adjustable head orientation.

Remote mounting of controls with 16'4" (5m) foot cord (other cords available) consult factory.

OPTIONAL FEATURES & ACCESSORIES

Hard coat anodized aluminum head with stainless steel rotors.

Stand to mount pump over ink container.

Dual stand to mount pump over two ink containers.

Filter mounting bracket.

Mixer to keep contents blended.

CE compliant.

MOTOR OPTIONS

Electric gear motor with electronic variable speed control (115 or 230 VAC) 50/60Hz.


TANK OPTIONS

1, 2, 5, gallon pails (accessory pump stand recommended).

10, 20, 30 gallon mild steel tanks. Stainless optional.


PUMP DIMENSIONS

SINGLE HEAD PERISTALTIC PUMP DIMENSIONS

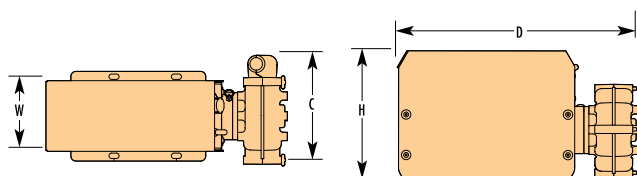

SERIES	C	W	H	D
PQS	5.9 (149)	5.3 (133)	9.9 (249)	15.3 (390)
PQL	8.0 (204)	5.3 (133)	9.9 (249)	17.8 (452)

DUAL HEAD PERISTALTIC PUMP DIMENSIONS

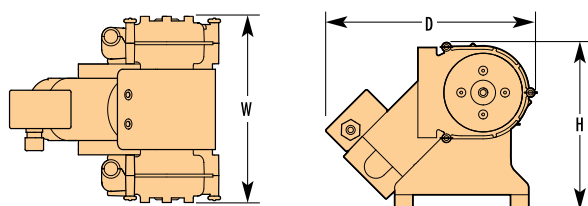

SERIES	W	H	D
PQS-DH	11.1" (283mm)	11.4 (289)	14.1 (357)
PQL-DH	12.8" (324)	11.4 (289)	15.12 (387)