


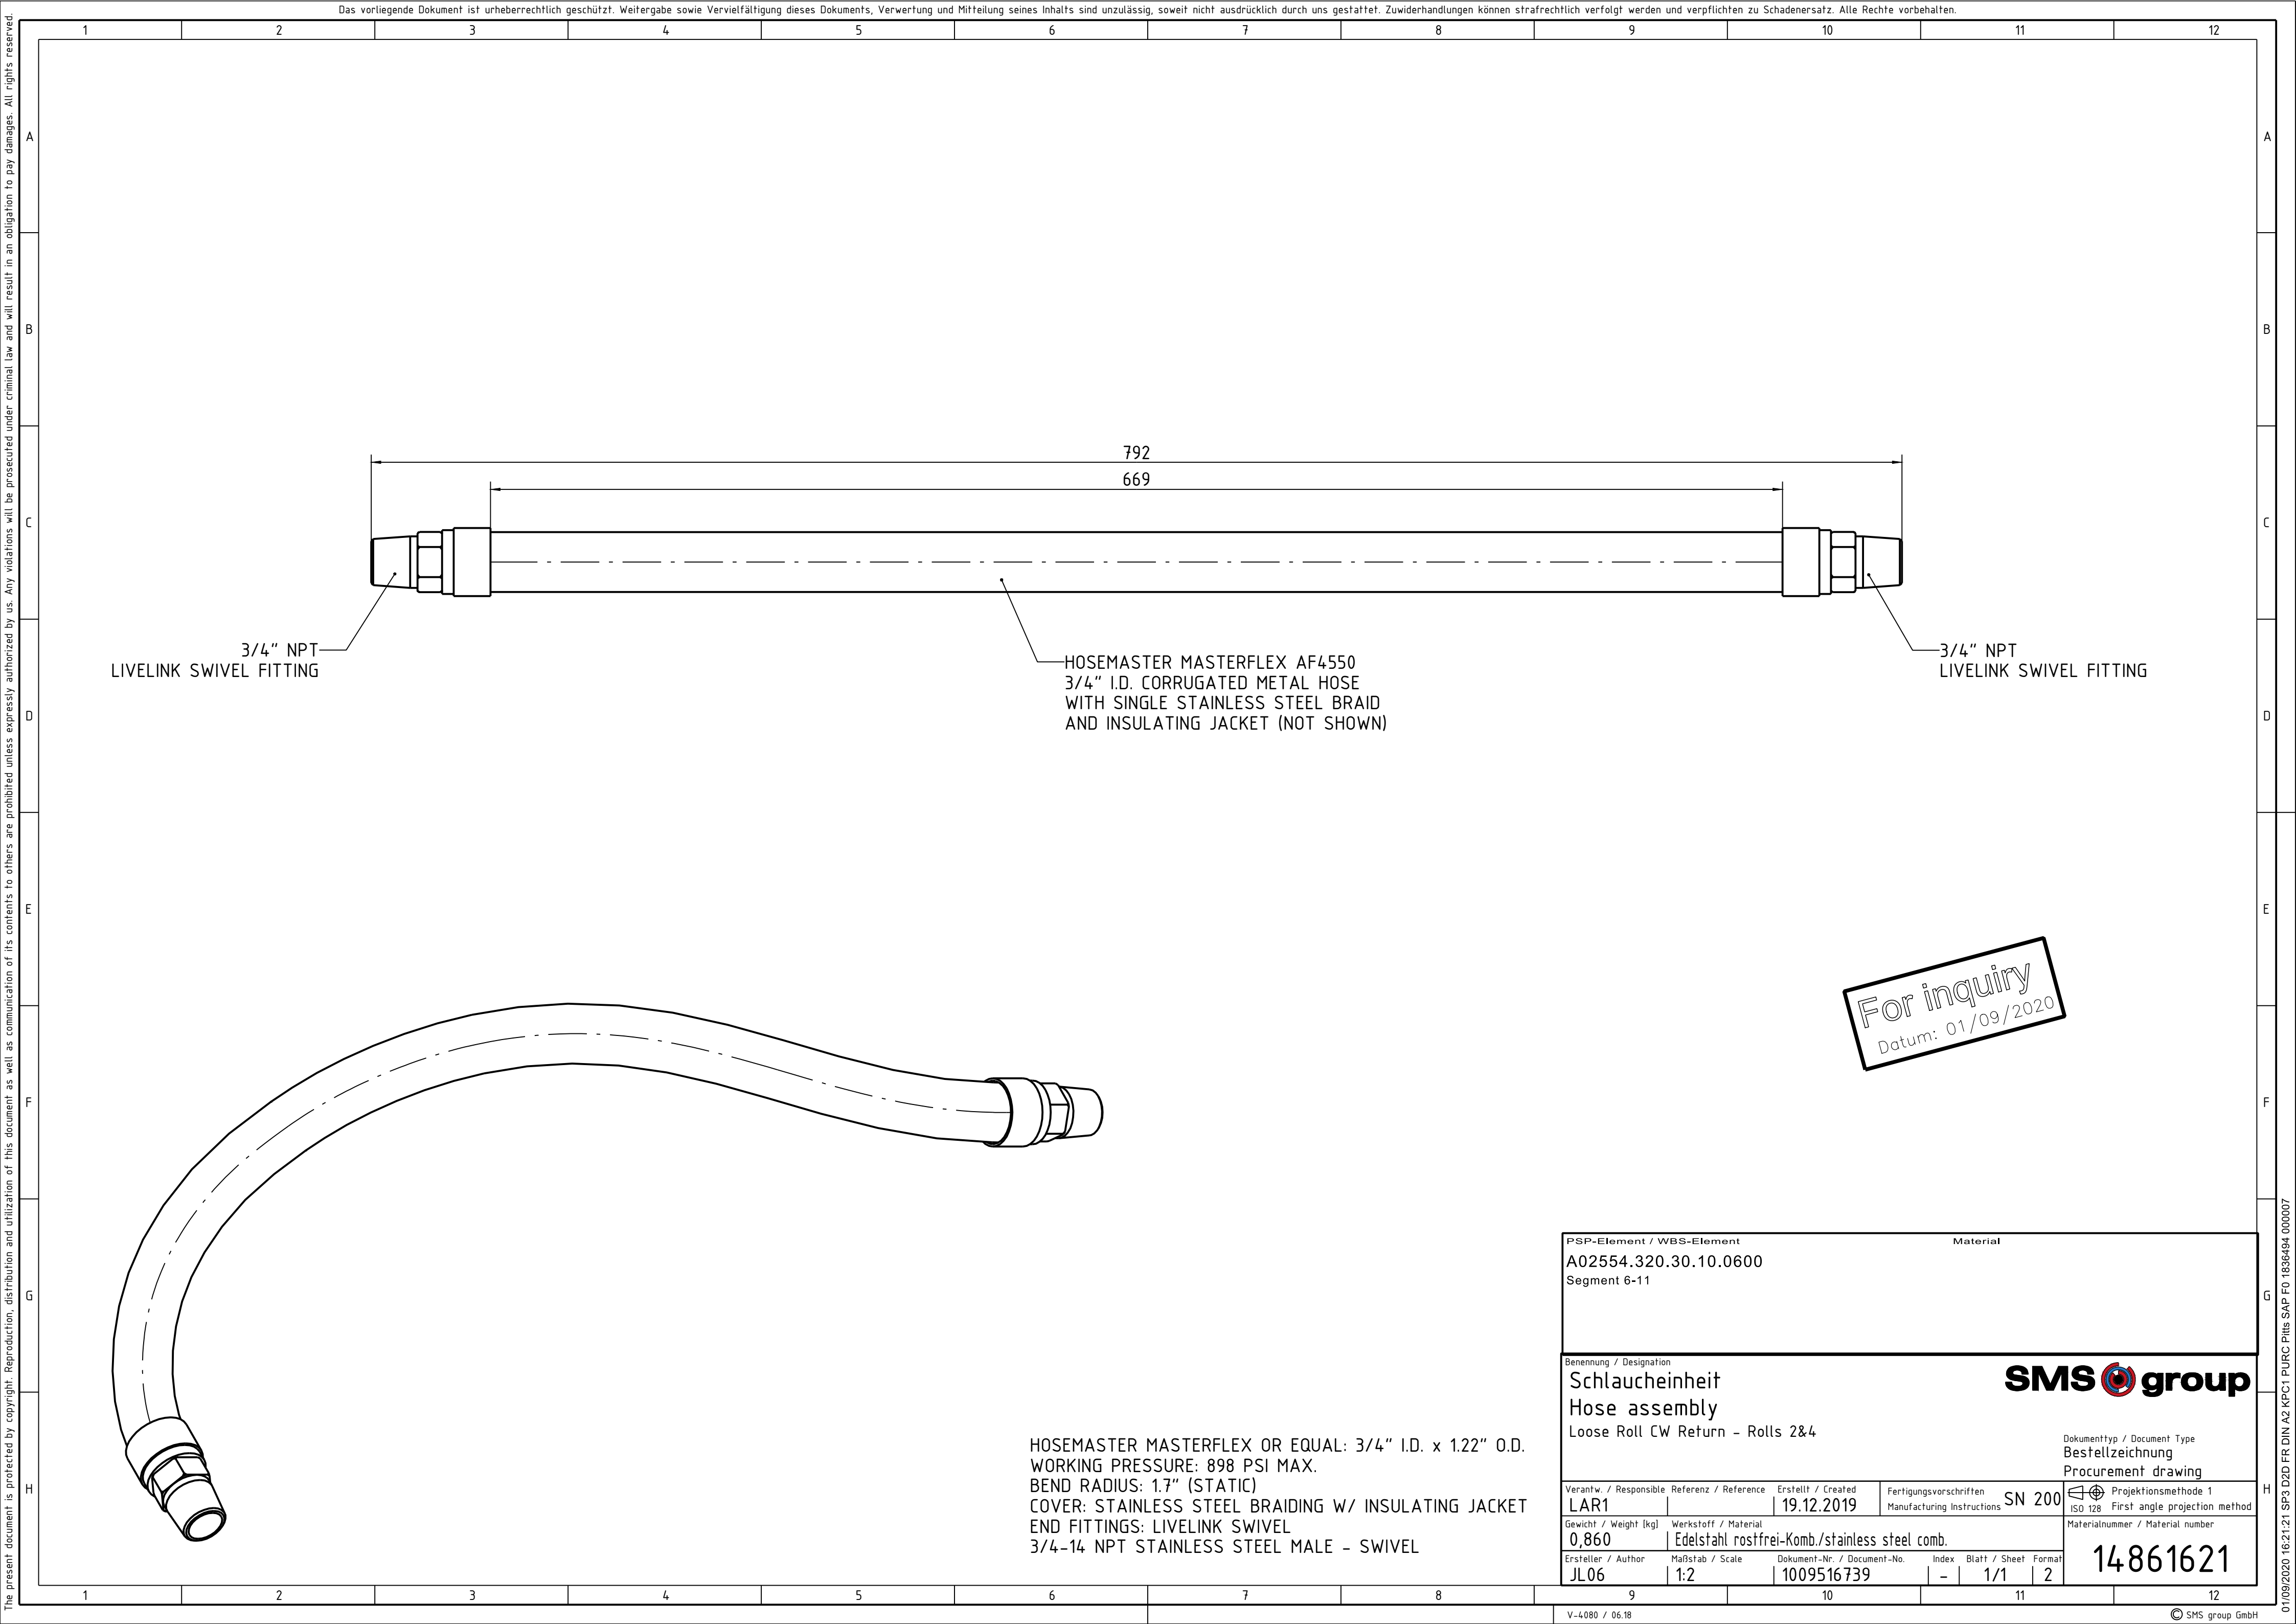

3/4" NPT
LIVELINK SWIVEL FITTING

HOSEMASTER MASTERFLEX AF4550
3/4" I.D. CORRUGATED METAL HOSE
WITH SINGLE STAINLESS STEEL BRAID
AND INSULATING JACKET (NOT SHOWN)

3/4" NPT
LIVELINK SWIVEL FITTING

For inquiry
Datum: 01/09/2020

HOSEMASTER MASTERFLEX OR EQUAL: 3/4" I.D. x 1.22" O.D.
WORKING PRESSURE: 898 PSI MAX.
BEND RADIUS: 1.7" (STATIC)
COVER: STAINLESS STEEL BRAIDING W/ INSULATING JACKET
END FITTINGS: LIVELINK SWIVEL
3/4-14 NPT STAINLESS STEEL MALE - SWIVEL

PSP-Element / WBS-Element				Material			
A02554.320.30.10.0600							
Segment 6-11							
Benennung / Designation				SMSgroup			
Schlauchereinheit							
Hose assembly							
Loose Roll CW Return - Rolls 2&4							
				Dokumenttyp / Document Type			
				Bestellzeichnung			
				Procurement drawing			
Verantw. / Responsible		Referenz / Reference		Erstellt / Created		Fertigungsvorschriften	
LAR1				19.12.2019		SN 200	
Gewicht / Weight (kg)		Werkstoff / Material					
0,860		Edelstahl rostfrei-Komb./stainless steel comb.					
Ersteller / Author		Maßstab / Scale		Dokument-Nr. / Document-No.		Index Blatt / Sheet Format	
JL06		1:2		1009516739		- 1/1 2	
						Projektionsmethode 1	
						ISO 128 First angle projection method	
						Materialnummer / Material number	
						14861621	